


Serie STR-80

Load capacity Up to 300 kg/pair

Full extension

Cross section 17,0 x 80,0 mm

STR-80

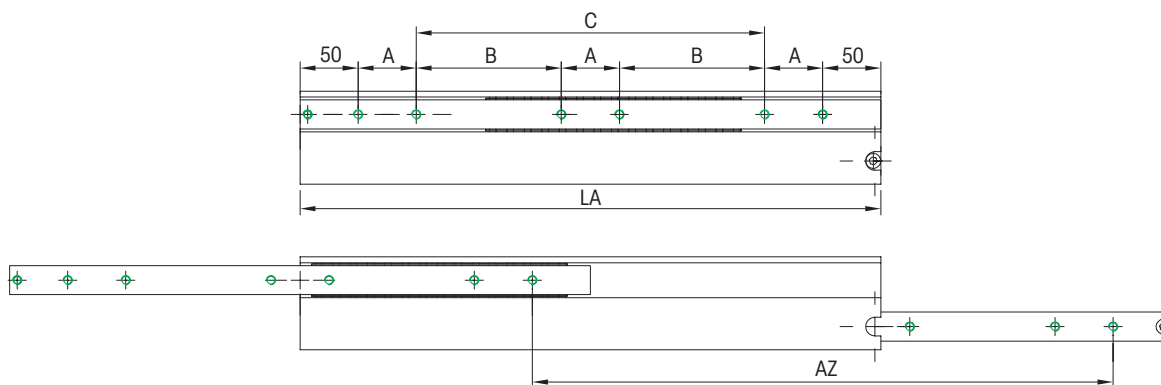

Material

Steel (C45E+C)
galvanised
milled airway


STR-...

one-way extension

Info:

L = Length
TP = Travel path
LC = Load capacity at
10,000 cycles
○ Drill pattern

SCHOCK
TELESCOPIC SLIDES

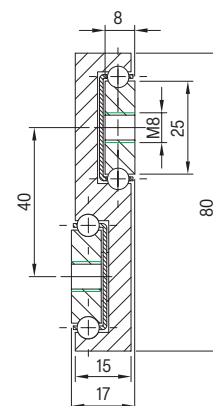

Article-Nr. STR-80		LC in kg 10.000	L mm	TP mm	A mm	B mm	C mm	Weight - kg/piece. STR-80	
07000354001		170	200	200	50	-	-	1,64	
07000354002		190	250	250	50	-	50	2,05	
07000354003		220	300	300	50	-	100	2,46	
07000354004		240	350	350	50	-	150	2,87	
07000354005		260	400	400	50	-	200	3,28	
07000354006		280	450	450	50	-	250	3,69	
07000354007		290	500	500	50	-	300	4,10	
07000354008		300	550	550	50	150	-	4,51	
07000354009		285	600	600	50	175	-	4,92	
07000354010		270	650	650	50	200	-	5,33	
07000354011		260	700	700	50	225	-	5,74	
07000354012		250	750	750	50	250	-	6,15	
07000354013		240	800	800	50	275	-	6,56	
07000354014		230	850	850	50	300	-	6,97	
07000354015		220	900	900	50	325	-	7,38	
07000354016		210	950	950	50	350	-	7,79	
07000354017		200	1000	1000	50	375	-	8,20	
07000354018		190	1050	1050	50	400	-	8,61	
07000354019		180	1100	1100	50	425	-	9,02	
...		...	...	...	...	...	...	...	
07000354029		60	1600	1600	50	675	-	13,12	

Serie STR-80

Load capacity Up to 300 kg/pair

Full extension

Cross section 17,0 x 80,0 mm

Article-Nr. STR-80		LC in kg 10.000	L mm	TP mm	A mm	B mm	C mm	Weight - kg/piece. STR-80	
07000354001		170	200	200	50	-	-	1,64	
07000354002		190	250	250	50	-	50	2,05	
07000354003		220	300	300	50	-	100	2,46	
07000354004		240	350	350	50	-	150	2,87	
07000354005		260	400	400	50	-	200	3,28	
07000354006		280	450	450	50	-	250	3,69	
07000354007		290	500	500	50	-	300	4,10	
07000354008		300	550	550	50	150	-	4,51	
07000354009		285	600	600	50	175	-	4,92	
07000354010		270	650	650	50	200	-	5,33	
07000354011		260	700	700	50	225	-	5,74	
07000354012		250	750	750	50	250	-	6,15	
07000354013		240	800	800	50	275	-	6,56	
07000354014		230	850	850	50	300	-	6,97	
07000354015		220	900	900	50	325	-	7,38	
07000354016		210	950	950	50	350	-	7,79	
07000354017		200	1000	1000	50	375	-	8,20	
07000354018		190	1050	1050	50	400	-	8,61	
07000354019		180	1100	1100	50	425	-	9,02	
07000354020		170	1150	1150	50	450	-	9,43	
07000354021		160	1200	1200	50	475	-	9,84	
07000354022		140	1250	1250	50	500	-	10,25	
07000354023		130	1300	1300	50	525	-	10,66	
07000354024		120	1350	1350	50	550	-	11,07	
07000354025		110	1400	1400	50	575	-	11,48	
07000354026		100	1450	1450	50	600	-	11,89	
07000354027		90	1500	1500	50	625	-	12,30	
07000354028		80	1550	1550	50	650	-	12,71	
07000354029		60	1600	1600	50	675	-	13,12	