

Serie OWS-60 | OWST-60

Load capacity Up to 750 kg/pair

Partial extension

Cross section 17,0 x 60,0 mm

Material

Steel (C45E+C)
galvanised
milled airway

OWS-...

one-way extension

OWST-...

two-way extension

Info:

L = Length


TP = Travel path

LC = Load capacity at
10,000 cycles



Drill pattern

SCHOCK
TELESCOPIC SLIDES

OWS-60

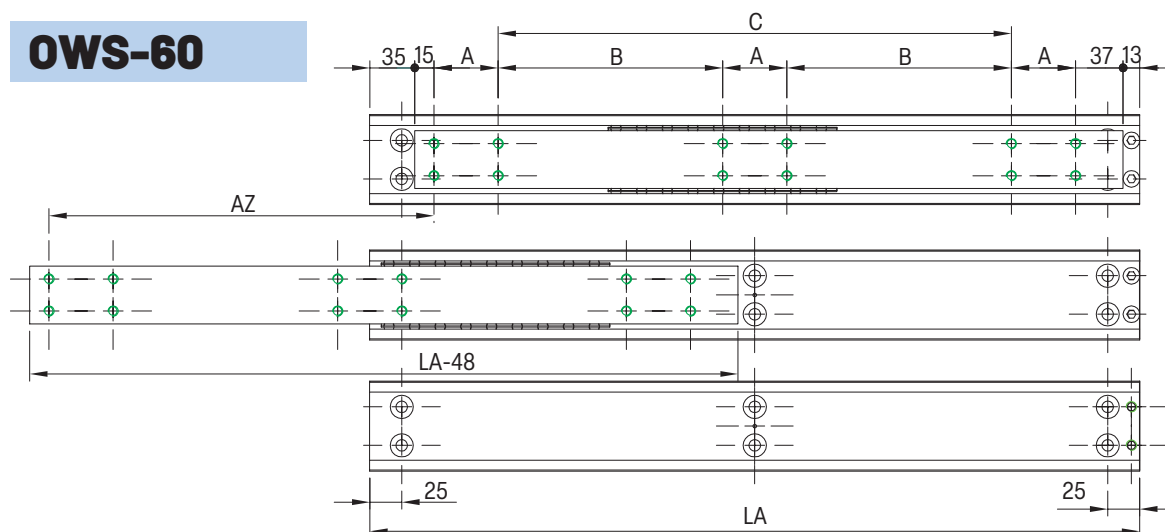

OWST-60

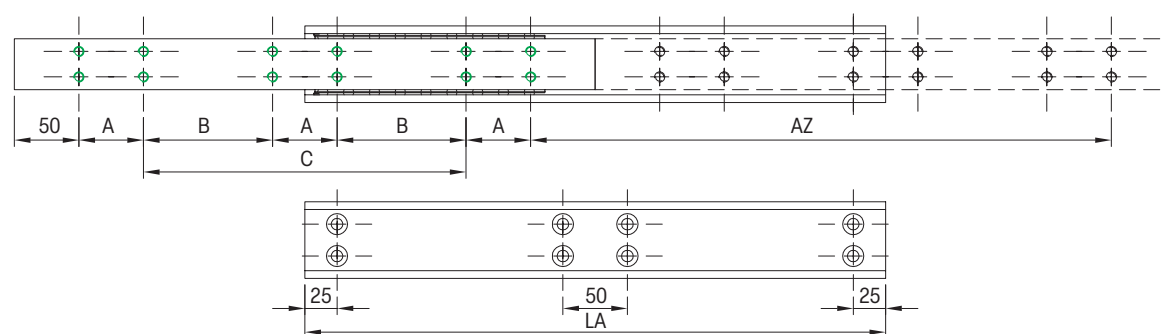

Article-Nr. OWS-60	Article-Nr. OWST-60	LC in kg 10.000	L mm	TP mm	A mm	B mm	C mm	Weight - kg/piece. OWS-60	Weight - kg/piece. OWST-60
07000936001	07000939001	520	300	150	50	-	100	2,28	2,07
07000936002	07000939002	560	350	175	50	-	150	2,66	2,42
07000936003	07000939003	610	400	200	50	-	200	3,04	2,76
07000936004	07000939004	660	450	225	50	-	250	3,42	3,11
07000936005	07000939005	710	500	250	50	-	300	3,80	3,45
07000936006	07000939006	720	550	275	50	-	350	4,18	3,80
07000936007	07000939007	730	600	300	50	-	400	4,56	4,14
07000936008	07000939008	740	650	325	50	200	-	4,94	4,49
07000936009	07000939009	750	700	350	50	225	-	5,32	4,83
07000936010	07000939010	740	750	375	50	250	-	5,70	5,18
07000936011	07000939011	720	800	400	50	275	-	6,08	5,52
07000936012	07000939012	700	850	425	50	300	-	6,46	5,87
07000936013	07000939013	680	900	450	50	325	-	6,84	6,21
07000936014	07000939014	660	950	475	50	350	-	7,22	6,55
07000936015	07000939015	640	1000	500	50	375	-	7,60	6,90
07000936016	07000939016	610	1050	525	50	400	-	7,98	7,25
07000936017	07000939017	580	1100	550	50	425	-	8,36	7,59
07000936018	07000939018	550	1150	575	50	450	-	8,74	7,93
07000936019	07000939019	520	1200	600	50	475	-	9,12	8,28
...	...	...	...	...	...	...	...	...	...
07000936035	07000939035	100	2000	1000	100	800	-	15,20	13,80

Serie OWS-60 | OWST-60

Load capacity Up to 750 kg/pair

Partial extension

Cross section 17,0 x 60,0 mm

Article-Nr. OWS-60	Article-Nr. OWST-60	LC in kg 10.000	L mm	TP mm	A mm	B mm	C mm	Weight - kg/piece. OWS-60	Weight - kg/piece. OWST-60
07000936001	07000939001	520	300	150	50	-	100	2,28	2,07
07000936002	07000939002	560	350	175	50	-	150	2,66	2,42
07000936003	07000939003	610	400	200	50	-	200	3,04	2,76
07000936004	07000939004	660	450	225	50	-	250	3,42	3,11
07000936005	07000939005	710	500	250	50	-	300	3,80	3,45
07000936006	07000939006	720	550	275	50	-	350	4,18	3,80
07000936007	07000939007	730	600	300	50	-	400	4,56	4,14
07000936008	07000939008	740	650	325	50	200	-	4,94	4,49
07000936009	07000939009	750	700	350	50	225	-	5,32	4,83
07000936010	07000939010	740	750	375	50	250	-	5,70	5,18
07000936011	07000939011	720	800	400	50	275	-	6,08	5,52
07000936012	07000939012	700	850	425	50	300	-	6,46	5,87
07000936013	07000939013	680	900	450	50	325	-	6,84	6,21
07000936014	07000939014	660	950	475	50	350	-	7,22	6,55
07000936015	07000939015	640	1000	500	50	375	-	7,60	6,90
07000936016	07000939016	610	1050	525	50	400	-	7,98	7,25
07000936017	07000939017	580	1100	550	50	425	-	8,36	7,59
07000936018	07000939018	550	1150	575	50	450	-	8,74	7,93
07000936019	07000939019	520	1200	600	50	475	-	9,12	8,28
07000936020	07000939020	490	1250	625	50	500	-	9,50	8,62
07000936021	07000939021	480	1300	650	50	525	-	9,88	8,97
07000936022	07000939022	460	1350	675	50	550	-	10,26	9,32
07000936023	07000939023	440	1400	700	50	575	-	10,64	9,66
07000936024	07000939024	420	1450	725	50	600	-	11,02	10,01
07000936025	07000939025	390	1500	750	50	625	-	11,40	10,35
07000936026	07000939026	360	1550	775	50	650	-	11,78	10,70
07000936027	07000939027	340	1600	800	50	675	-	12,16	11,04
07000936028	07000939028	315	1650	825	50	700	-	12,54	11,38
07000936029	07000939029	290	1700	850	100	650	-	12,92	11,73
07000936030	07000939030	275	1750	875	100	675	-	13,30	12,08
07000936031	07000939031	250	1800	900	100	700	-	13,68	12,42
07000936032	07000939032	220	1850	925	100	725	-	14,06	12,77
07000936033	07000939033	190	1900	950	100	750	-	14,44	13,11
07000936034	07000939034	160	1950	975	100	775	-	14,82	13,46
07000936035	07000939035	130	2000	1000	100	800	-	15,20	13,80