

Serie ADDTS-40

Tragkraft bis 50 kg/Paar

Überauszug, Querschnitt 48,0 x 40,0 mm

Material

Aluminium
EN-AW 6082 T6
gefräste Laufbahn



ADDTS-...

einseitig ausziehbar

Hinweise:

LA = Länge
AZ = Auszugsweg
TK = Tragkraft bei
10.000 Zyklen
Bohrbild

SCHOCK
TELESKOPSCIENEN

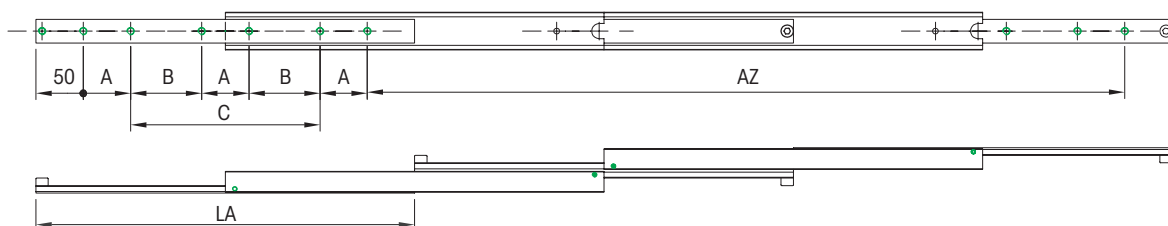

Artikel-Nr. ADDTS-40		TK in kg 10.000	LA mm	AZ mm	A mm	B mm	C mm	Gewicht - kg/St. ADDTS-40	
07000455001		38	200	400	50	-	-	0,92	
07000455002		40	250	500	50	-	50	1,15	
07000455003		42	300	600	50	-	100	1,38	
07000455004		44	350	700	50	-	150	1,61	
07000455005		46	400	800	50	-	200	1,84	
07000455006		48	450	900	50	-	250	2,07	
07000455007		50	500	1000	50	-	300	2,30	
07000455008		48	550	1100	50	150	-	2,53	
07000455009		46	600	1200	50	175	-	2,76	
07000455010		42	650	1300	50	200	-	2,99	
07000455011		40	700	1400	50	225	-	3,22	
07000455012		39	750	1500	50	250	-	3,45	
07000455013		38	800	1600	50	275	-	3,68	
07000455014		37	850	1700	50	300	-	3,91	
07000455015		36	900	1800	50	325	-	4,14	
07000455016		35	950	1900	50	350	-	4,37	
07000455017		34	1000	2000	50	375	-	4,60	
07000455018		33	1050	2100	50	400	-	4,83	
07000455019		32	1100	2200	50	425	-	5,06	
07000455020		30	1150	2300	50	450	-	5,29	
07000455021		28	1200	2400	50	475	-	5,52	